



**Declaration Owner**

Sloan Valve Company

10500 Seymour Avenue

Franklin Park, IL 60131

customer.service@sloan.com | 800.982.5839

<https://www.sloan.com>

**Product**

Sloan Basys® EFX Sensor Faucets

**Functional Unit**

1 packaged, installed unit with a Reference Service Life of 10 years in a building with an Estimated Service Life of 75 years

**EPD Number and Period of Validity**

SCS-EPD-09754

EPD Valid January 10, 2024 through January 9, 2029

**Product Category Rule**

UL. PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 3.2. December 2018.

UL PCR Guidance for Building-Related Products and Services Part B: Kitchen and Bath Fixture Fittings and Accessory Products EPD Requirements. Version 1.0. October 2020.



**Program Operator**

SCS Global Services

2000 Powell Street, Ste. 600, Emeryville, CA 94608

+1.510.452.8000 | [www.SCSglobalServices.com](http://www.SCSglobalServices.com)



|   |   |
|---|---|
| Declaration owner:  | Sloan Valve Company   |
| Address:  | 10500 Seymour Avenue, Franklin Park, IL 60131   |
| Declaration Number:   | SCS-EPD-09754   |
| Declaration Validity Period:  | EPD Valid January 10, 2024 through January 9, 2029  |
| Program Operator:   | SCS Global Services   |
| Declaration URL Link:   | <a href="https://www.scsglobalservices.com/certified-green-products-guide">https://www.scsglobalservices.com/certified-green-products-guide</a>   |
| LCA Practitioner:   | Beth Cassese, SCS Global Services   |
| LCA Software and LCI database:  | OpenLCA 2.0.3 software and the Ecoinvent v3.9.1 database  |
| Product's Intended Application:   | Fitting designed to discharge a specific volume of water into a lavatory.   |
| Product RSL:  | 10 Years (ESL 75 Years)   |
| Markets of Applicability:   | North America   |
| EPD Type:   | Product-Specific  |
| EPD Scope:  | Cradle-to-Grave   |
| LCIA Method and Version:  | CML-IA Baseline and TRACI 2.1   |
| Independent critical review of the LCA and data, according to ISO 14044 and ISO 14071   | <input type="checkbox"/> internal <input checked="" type="checkbox"/> external  |
| LCA Reviewer:   | <br>Thomas Gloria, PhD., Industrial Ecology Consultants   |
| Product Category Rule:  | UL PCR Guidance for Building-Related Products and Services Part B: Kitchen and Bath Fixture Fittings and Accessory Products EPD Requirements. Version 1.0. October 2020.  |
| PCR Review conducted by:  | Jim Mellentine, Angela Fisher, Christopher Marozzi  |
| Independent verification of the declaration and data, according to ISO 14025 and the PCR  | <input type="checkbox"/> internal <input checked="" type="checkbox"/> external  |
| EPD Verifier:   | <br>Thomas Gloria, PhD., Industrial Ecology Consultants   |
| Declaration Contents:   | <ul style="list-style-type: none"> <li>1. ABOUT Sloan.....2</li> <li>2. PRODUCT .....2</li> <li>3. LCA: METHODOLOGICAL FRAMEWORK .....5</li> <li>4. LCA: TECHNICAL INFORMATION AND SCENARIOS ..... 10</li> <li>5. LCA: Results ..... 14</li> <li>6. LCA: INTERPRETATION ..... 17</li> <li>7. ADDITIONAL ENVIRONMENTAL INFORMATION ..... 18</li> <li>8. REFERENCES ..... 19</li> </ul> |
| <p><b>Disclaimers:</b> This EPD conforms to ISO 14025, 14040, 14044, and ISO 21930.</p> <p><b>Scope of Results Reported:</b> The PCR requirements limit the scope of the LCA metrics such that the results exclude environmental and social performance benchmarks and thresholds, and exclude impacts from the depletion of natural resources, land use ecological impacts, ocean impacts related to greenhouse gas emissions, risks from hazardous wastes and impacts linked to hazardous chemical emissions.</p> <p><b>Accuracy of Results:</b> Due to PCR constraints, this EPD provides estimations of potential impacts that are inherently limited in terms of accuracy.</p> <p><b>Comparability:</b> The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.</p> <p>In accordance with ISO 21930:2017, EPDs are comparable only if they comply with the core PCR, use the same sub-category PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works.</p> |   |

# 1. ABOUT Sloan

Sloan is the world's leading manufacturer of commercial plumbing systems and has been in operation since 1906. Headquartered in Franklin Park, Illinois, USA, the company is at the forefront of the green building movement and provides smart, sustainable restroom solutions by manufacturing water-efficient products such as flushometers, electronic faucets, sink systems, soap dispensing systems, and vitreous china fixtures for commercial, industrial, and institutional markets worldwide.

The Sloan Basys® EFX sensor faucets are manufactured in Rebstein, Switzerland.

# 2. PRODUCT

## 2.1 Product Description

Sloan faucet products belong to the Commercial Plumbing Fixtures specification code, CSI code 22 42 39 and the UNSPSC code 30181700.

A faucet is a fitting designed for discharge of a specific volume of water into a lavatory that is turned on mechanically or electronically, and intended to be installed in non-residential bathrooms that are exposed to walk-in traffic. The volume or cycle duration can be fixed or adjustable. Lavatory faucets are used primarily for hand washing or simple rinsing. Basys® faucets feature a cast brass spout, quick connect fittings, infrared sensors and integrated water shut-off. The product systems under study include the following products.



**EFX 200**



**EFX 250**



**EFX 275**



**EFX 277**



**EFX 280**

**Table 1.** Sloan Basys EFX Sensor Faucet models represented in this EPD.

| Model   | Flow Rates                         | Power Source |
|---------|------------------------------------|--------------|
| EFX 200 | 0.5 gpm/1.9 Lpm<br>1.5 gpm/5.7 Lpm | Hardwired    |
| EFX 250 | 0.5 gpm/1.9 Lpm<br>1.5 gpm/5.7 Lpm | Battery      |
| EFX 275 | 0.5 gpm/1.9 Lpm<br>1.5 gpm/5.7 Lpm | Solar        |
| EFX 277 | 0.5 gpm/1.9 Lpm<br>1.5 gpm/5.7 Lpm | Solar        |
| EFX 280 | 0.5 gpm/1.9 Lpm<br>1.5 gpm/5.7 Lpm | Turbine      |

\*gpm=gallons per minute | Lpm=Liters per minute

## 2.2 Application

Sloan sensor faucets are designed for use with lavatories as the dispensing unit for the water supplied. The faucets are primarily installed in commercial, industrial, and institutional markets worldwide.

## 2.3 Representative Product

All of the Basys® EFX sensor faucet product lines share similar raw material component breakdown, mass, and the same manufacturing process, with the main differences being the internal configurations and slight shape changes to the exterior design. An average product was calculated as the representative product for the sensor faucets in this study.

### 2.4 Flow Diagram

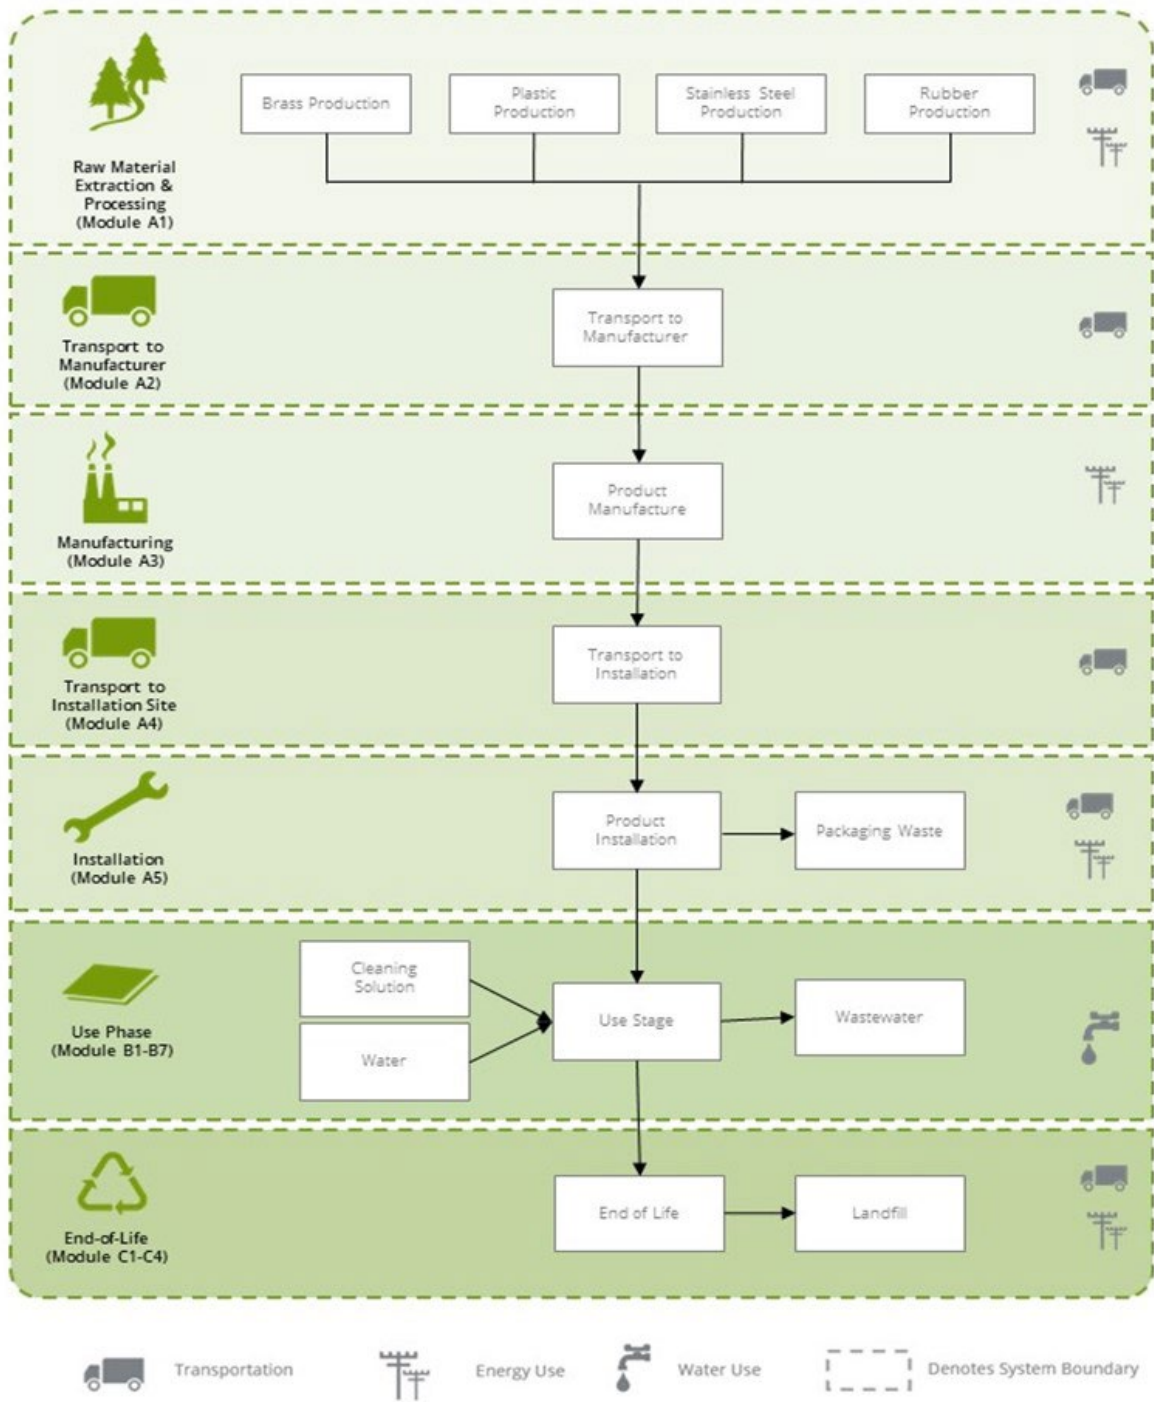


Figure 1. Flow diagram for the Sloan Basys® EFX Sensor Faucets.

## 2.5 Material Composition

**Table 2.** Sloan Basys® EFX Sensor Faucet Material Components.

| Material        | Mass (kg)   | Percentage of Total Mass | Pre-Consumer Recycled Content | Post-Consumer Recycled Content |
|-----------------|-------------|--------------------------|-------------------------------|--------------------------------|
| Zinc            | 0.604       | 45.2%                    | 0%                            | 0%                             |
| Brass           | 0.208       | 15.6%                    | 20%                           | 0%                             |
| Nylon           | 0.124       | 9.3%                     | 0%                            | 0%                             |
| Stainless Steel | 0.100       | 7.5%                     | 15%                           | 0%                             |
| Battery         | 0.096       | 7.2%                     | 0%                            | 0%                             |
| Copper          | 0.063       | 4.7%                     | 0%                            | 0%                             |
| Sensor          | 0.050       | 3.7%                     | 0%                            | 0%                             |
| EPDM            | 0.027       | 2.0%                     | 0%                            | 0%                             |
| Silicone        | 0.019       | 1.5%                     | 0%                            | 0%                             |
| Plastic         | 0.018       | 1.3%                     | 0%                            | 0%                             |
| Turbine         | 0.011       | 0.8%                     | 0%                            | 0%                             |
| Cable           | 0.01        | 0.8%                     | 0%                            | 0%                             |
| Rubber          | 0.006       | 0.4%                     | 0%                            | 0%                             |
| Magnet          | 0.0002      | 0.02%                    | 0%                            | 0%                             |
| <b>Total</b>    | <b>1.34</b> | <b>100%</b>              | -                             | -                              |

## 2.5 Technical Requirements

**Table 3.** Sloan Basys® EFX Sensor Faucet Technical Requirements.

| Property  | Unit               | Value    |
|-----------|--------------------|----------|
| Flow rate | Gallons per minute | 0.5, 1.5 |
|           | Liters per minute  | 1.9, 5.7 |

## 3. LCA: METHODOLOGICAL FRAMEWORK

### 3.1 Functional Unit

The functional unit used in the study is one (1) packaged, installed unit with a reference service life (RSL) of 10 years. The building estimated service life (ESL) is assumed to be 75-years in order to be consistent with ASHRAE 189.1 (2014, Section 9.5.1).

**Table 4.** Sloan Basys® EFX Sensor Faucet Functional Unit Properties.

| Property        | Unit                                | Value |
|-----------------|-------------------------------------|-------|
| Functional Unit | One (1) packaged, installed product |       |
| RSL             | Years                               | 10    |
| ESL             | Years                               | 75    |
| Mass            | kg                                  | 1.34  |

### 3.2 System Boundary

The scope of the EPD is cradle-to-grave, including raw material extraction and processing; raw material transportation; product manufacture, including packaging; product distribution; installation; use; and end-of-life.

**Table 5.** Sloan Basys® EFX Sensor Faucet System Boundaries.

| Product                                |                           |               | Construction Process |                             | Use |             |        |             |               |                        |                       | End-of-life               |           |                  |          | Benefits and loads beyond the system boundary |
|--|---------------------------|---------------|----------------------|-----------------------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|---------------------------|-----------|------------------|----------|---|
| A1                                     | A2                        | A3            | A4                   | A5                          | B1  | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                        | C2        | C3               | C4       | D   |
| Raw material extraction and processing | Transport to manufacturer | Manufacturing | Transport            | Construction - installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstruction demolition | Transport | Waste processing | Disposal | Reuse, recovery and/or recycling potential    |
| X                                      | X                         | X             | X                    | X                           | X   | X           | X      | X           | X             | X                      | X                     | X                         | X         | X                | X        | MND   |

X = Included in system boundary

MND = Module not declared

### 3.3 Allocation

Manufacturing resource use was allocated to the products based on mass. Impacts from transportation were allocated based on the mass of material and distance transported.

### 3.3 Cut-off criteria

According to the PCR, processes contributing greater than 1% of the total environmental impact indicator for each impact are included in the inventory. No data gaps were allowed which were expected to significantly affect the outcome of the indicator results.

### 3.4 Data Sources

Primary data were provided for the facility in Rebstein, Switzerland. The principal source of secondary LCI data is the Ecoinvent 3.9.1 database.

**Table 6.** LCI datasets and associated databases used to model the Sloan Sensor Faucet products.

| Component      | Dataset  | Geography        | Data Source     | Date |
|----------------|--|------------------|-----------------|------|
| <b>Product</b> |  |                  |                 |      |
| ABS            | market for acrylonitrile-butadiene-styrene copolymer   acrylonitrile-butadiene-styrene copolymer   Cutoff, U | Global           | Ecoinvent 3.9.1 | 2022 |
|                | market for injection moulding   injection moulding   Cutoff, U   | Global           | Ecoinvent 3.9.1 | 2022 |
| Acetal         | market for polypropylene, granulate   polypropylene, granulate   Cutoff, U                                   | Global           | Ecoinvent 3.9.1 | 2022 |
|                | market for injection moulding   injection moulding   Cutoff, U   | Global           | Ecoinvent 3.9.1 | 2022 |
| Battery        | market for battery cell, Li-ion, LiMn2O4   battery cell, Li-ion, LiMn2O4   Cutoff, U                         | Global           | Ecoinvent 3.9.1 | 2022 |
| Cable          | market for cable, unspecified   cable, unspecified   Cutoff, U   | Global           | Ecoinvent 3.9.1 | 2022 |
| Brass          | market for brass   brass   Cutoff, U   | RoW <sup>1</sup> | Ecoinvent 3.9.1 | 2022 |
|                | market for casting, brass   casting, brass   Cutoff, U   | Global           | Ecoinvent 3.9.1 | 2022 |

| Component          | Dataset  | Geography     | Data Source     | Date |
|--------------------|--|---------------|-----------------|------|
| Copper             | market for copper, cathode   copper, cathode   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
|                    | market for metal working, average for copper product manufacturing   metal working, average for copper product manufacturing   Cutoff, U                 | Global        | Ecoinvent 3.9.1 | 2022 |
| EPDM               | market for synthetic rubber   synthetic rubber   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
|                    | market for injection moulding   injection moulding   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| Magnet             | market for permanent magnet, for electric motor   permanent magnet, for electric motor   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| NBR                | market for synthetic rubber   synthetic rubber   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
|                    | market for injection moulding   injection moulding   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| Nylon              | market for nylon 6-6   nylon 6-6   Cutoff, U   | RoW           | Ecoinvent 3.9.1 | 2022 |
|                    | market for extrusion of plastic sheets and thermoforming, inline   extrusion of plastic sheets and thermoforming, inline   Cutoff, U                     | Global        | Ecoinvent 3.9.1 | 2022 |
| Polypropylene      | market for polypropylene, granulate   polypropylene, granulate   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
|                    | market for injection moulding   injection moulding   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| Rubber             | market for synthetic rubber   synthetic rubber   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
|                    | market for injection moulding   injection moulding   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| SAN                | market for styrene-acrylonitrile copolymer   styrene-acrylonitrile copolymer   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
|                    | market for injection moulding   injection moulding   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| Sensor             | market for electronic component, active, unspecified   electronic component, active, unspecified   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| Silicone           | market for silicone product   silicone product   Cutoff, U   | RoW           | Ecoinvent 3.9.1 | 2022 |
| Stainless Steel    | market for steel, chromium steel 18/8, hot rolled   steel, chromium steel 18/8, hot rolled   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
|                    | market for metal working, average for chromium steel product manufacturing   metal working, average for chromium steel product manufacturing   Cutoff, U | Global        | Ecoinvent 3.9.1 | 2022 |
| Zinc               | market for zinc   zinc   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
|                    | market for metal working, average for metal product manufacturing   metal working, average for metal product manufacturing   Cutoff, U                   | Global        | Ecoinvent 3.9.1 | 2022 |
| <b>Package</b>     |  |               |                 |      |
| Aluminium          | market for aluminium, primary, ingot   aluminium, primary, ingot   Cutoff, U   | RoW           | Ecoinvent 3.9.1 | 2022 |
|                    | market for section bar extrusion, aluminium   section bar extrusion, aluminium   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| Cardboard          | market for containerboard, unspecified   containerboard, unspecified   Cutoff, U   | United States | Ecoinvent 3.9.1 | 2022 |
| Carrier Foil       | market for printed paper, offset   printed paper, offset   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| Paper              | market for kraft paper   kraft paper   Cutoff, U   | RoW           | Ecoinvent 3.9.1 | 2022 |
| PE Plastic         | market for packaging film, low density polyethylene   packaging film, low density polyethylene   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| Vinyl              | market for polyvinylchloride, bulk polymerised   polyvinylchloride, bulk polymerised   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
|                    | market for extrusion, plastic film   extrusion, plastic film   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| <b>Transport</b>   |  |               |                 |      |
| Ship               | market for transport, freight, sea, container ship   transport, freight, sea, container ship   Cutoff, U   | Global        | Ecoinvent 3.9.1 | 2022 |
| Train              | market for transport, freight train   transport, freight train   Cutoff, U   | RoW           | Ecoinvent 3.9.1 | 2022 |
| Truck              | market for transport, freight, lorry 16-32 metric ton, EURO4   transport, freight, lorry 16-32 metric ton, EURO4   Cutoff, U                             | RoW           | Ecoinvent 3.9.1 | 2022 |
| <b>Manufacture</b> |  |               |                 |      |
| Electricity        | market for electricity, medium voltage   electricity, medium voltage   Cutoff, U   | Switzerland   | Ecoinvent 3.9.1 | 2022 |
| Natural Gas        | heat and power co-generation, natural gas, 500kW electrical, lean burn   heat, district or industrial, natural gas   Cutoff, U                           | Switzerland   | Ecoinvent 3.9.1 | 2022 |
| Water              | market for tap water   tap water   Cutoff, U   | Switzerland   | Ecoinvent 3.9.1 | 2022 |
| <b>Waste</b>       |  |               |                 |      |
| Hazardous Waste    | market for hazardous waste, for incineration   hazardous waste, for incineration   Cutoff, U   | Switzerland   | Ecoinvent 3.9.1 | 2022 |
| Landfill           | market for inert waste, for final disposal   inert waste, for final disposal   Cutoff, U   | Switzerland   | Ecoinvent 3.9.1 | 2022 |
| Wastewater         | market for wastewater, average   wastewater, average   Cutoff, U   | Switzerland   | Ecoinvent 3.9.1 | 2022 |

†Rest of World



### 3.5 Data Quality

**Table 7.** *Data Quality Assessment.*

| Data Quality Parameter  | Data Quality Discussion  |
|---|--|
| <b>Time-Related Coverage:</b><br>Age of data and the minimum length of time over which data is collected  | The manufacturer provided primary data on product manufacturing for the facility annual production for 2022. Representative datasets (secondary data) for upstream and background processes are generally less than 5 years old.   |
| <b>Geographical Coverage:</b><br>Geographical area from which data for unit processes is collected to satisfy the goal of the study   | The data used in the analysis provide the best possible representation available with current data. Electricity use for product manufacture is modeled using representative data modelled for the specific electricity grids represented in this study. Surrogate data used in the assessment are representative of global or European operations and are considered sufficiently similar to actual processes.   |
| <b>Technology Coverage:</b><br>Specific technology or technology mix  | For the most part, data are representative of the actual technologies used for processing, transportation, and manufacturing operations. Representative component datasets, specific to the type of material, are used to represent the actual processes, as appropriate.  |
| <b>Precision:</b><br>Measure of the variability of the data values for each data expressed  | Precision of results are not quantified due to a lack of data. Data collected for operations were typically averaged for one more years and over multiple operations, which is expected to reduce the variability of results.  |
| <b>Completeness:</b><br>Percentage of flow that is measured or estimated  | The LCA model included all known mass and energy flows for production of the products. In some instances, surrogate data used to represent upstream and downstream operations may be missing some data which is propagated in the model. No known processes or activities contributing to more than 1% of the total environmental impact for each indicator are excluded.  |
| <b>Representativeness:</b><br>Qualitative assessment of the degree to which the data set reflects the true population of interest   | Data used in the assessment represent typical or average processes as currently reported from multiple data sources and are therefore generally representative of the range of actual processes and technologies for production of these materials. Considerable deviation may exist among actual processes on a site-specific basis; however, such a determination would require detailed data collection throughout the supply chain back to resource extraction.  |
| <b>Consistency:</b><br>Qualitative assessment of whether the study methodology is applied uniformly to the various components of the analysis   | The consistency of the assessment is considered to be high. Data sources of similar quality and age are used; with a bias towards Ecoinvent v3.9.1 data where available. Different portions of the product life cycle are equally considered.  |
| <b>Reproducibility:</b><br>Qualitative assessment of the extent to which information about the methodology and data values would allow an independent practitioner to reproduce the results reported in the study | Based on the description of the data and assumptions used, this assessment would be reproducible by other practitioners. All assumptions, models, and data sources are documented.   |
| <b>Sources of the Data:</b><br>Description of all primary and secondary data sources  | Data representing energy use at the manufacturing facilities represent a 12-month average and are considered of high quality due to the length of time over which these data are collected, as compared to a snapshot that may not accurately reflect fluctuations in production. For secondary LCI data, Ecoinvent v3.9.1 data are used.  |
| <b>Uncertainty of the Information:</b><br>Uncertainty related to data, models, and assumptions  | Uncertainty related to materials in the products and packaging is low. Actual supplier data for upstream operations was not available for all suppliers and the study relied upon the use of existing representative datasets. These datasets contained relatively recent data (<10 years) but lacked geographical representativeness. Uncertainty related to the impact assessment methods used in the study are high. The impact assessment methodology includes impact potentials, which lack characterization of providing and receiving environments or tipping points. |

### 3.6 Period under review

The period of review is based on a 12-month period from January 2022 through December 2022.

### 3.7 Comparability

The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.

### 3.8 Estimates and Assumptions

- Specific data were not available on acetal polymers in the product recipe. Secondary datasets for polypropylene were used from the Ecoinvent database to represent these polymers in the LCA model.
- Specific data were not available on EPDM and NBR in the product recipe. Secondary datasets for synthetic rubber were used from the Ecoinvent database to represent these materials in the LCA model.
- Product transport from point of purchase to the building site is assumed to be 500 km by truck as required by the Part B PCR.
- Product transport from the Sloan distribution centers in Los Angeles, CA and New York, NY to points of purchase was assumed to be 4500 km by truck, representing the assumed longest distance across the United States.
- Product transport from the manufacturing site to a sea port for ocean transport is assumed to be 430 km by truck.
- Ocean transport of the product is assumed to be 7506 km for products manufactured in the facility.
- Installation of the products is assumed to be manual, requiring no additional materials or energy use.
- Transport of the packaging waste at installation is assumed to be 100 km by truck as required by the Part B PCR.
- Transport of the product at end-of-life to waste processing and disposal is assumed to be 100 km by truck as required by the Part B PCR.
- The Reference Service Life (RSL) of the products was modeled as 10 years, as required by the Part B PCR.
- The Estimated Service Life (ESL) of the building/construction works was assumed to be 75 years, as required by the Part B PCR, in order to be consistent with ASHRAE 189.1 (2014, Section 9.5.1).
- The maintenance of the products is assumed to include daily cleaning with a cleaning solution of 10 ml of 1% sodium lauryl sulfate solution as specified in the Part B PCR.
- The repair of the products is assumed to include the replacement of battery component parts, including an assumed 50 km by truck transport, 2 times over the RSL, according to manufacturer experts.
- The products are assumed to require no replacement during the 10-year RSL, but in accordance with the Part A PCR and Part B PCR, requires replacement 6.5 times over the 75-year ESL.
- The use phase module B5 (Refurbishment) is assumed to have no impacts, as there is no resource or energy use associated with this module.
- The use phase modules are modeled for the building/construction works ESL of 75 years.
- For the product end-of-life, disposal of product is assumed to follow the disposal scenario indicated in the Part A PCR.

## 4. LCA: TECHNICAL INFORMATION AND SCENARIOS

### 4.1 Manufacture

This module includes the manufacturing, assembly and packaging of the Basys® EFX sensor faucets at the manufacturing facility in Rebstein, Switzerland.

### 4.2 Packaging

**Table 8.** Sloan Basys® EFX Sensor Faucet packaging material components.

| Packaging material | Mass (kg)    | Percentage of Total Mass | Pre-Consumer Recycled Content | Post-Consumer Recycled Content |
|--------------------|--------------|--------------------------|-------------------------------|--------------------------------|
| Cardboard          | 0.377        | 91%                      | 0%                            | 100%                           |
| Paper              | 0.032        | 7.8%                     | 0%                            | 100%                           |
| Paper Foil         | 0.0003       | 0.01%                    | 0%                            | 0%                             |
| Polyethylene       | 0.004        | 0.9%                     | 0%                            | 50%                            |
| Vinyl              | 0.0005       | 0.1%                     | 0%                            | 0%                             |
| <b>Total</b>       | <b>0.414</b> | <b>100%</b>              | <b>-</b>                      | <b>-</b>                       |

### 4.3 Transportation

**Table 9.** Sloan Basys® EFX Sensor Faucet Transportation Summary.

| Name   | Unit      | Value           |
|--|-----------|-----------------|
| Vehicle Type                                       | -         | Freight Truck   |
| Liters of fuel                                     | l/100 km  | 18.7            |
| Fuel Type  | -         | Diesel          |
| Transport Distance                                 | km        | 5430            |
| <i>Factory to Port (assumed)</i>                   | <i>km</i> | <i>430</i>      |
| <i>Port to Distribution (assumed)</i>              | <i>km</i> | <i>4500</i>     |
| <i>Point of purchase to installation (per PCR)</i> | <i>km</i> | <i>500</i>      |
| Capacity utilization                               | %         | 50              |
| Vehicle Type                                       | -         | Ocean Freighter |
| Liters of fuel                                     | l/100 km  | 0.41            |
| Fuel Type  | -         | Heavy Fuel Oil  |
| Transport Distance                                 | km        | 7506            |
| <i>Port to Port (assumed)</i>                      | <i>km</i> | <i>7506</i>     |
| Capacity utilization                               | %         | n/a             |
| Gross mass of products transported <sup>1</sup>    | kg        | 1.75            |

<sup>1</sup> including packaging

#### 4.4 Installation

The installation of the sensor faucet products is completed using manual labor and does not require additional ancillary materials. Waste is generated from the disposal of the packaging materials and is modeled as required in the Part A PCR.

**Table 10.** *Sloan Basys® EFX Sensor Faucet installation summary.*

| Name  | Unit                | Value |
|---|---------------------|-------|
| Ancillary materials   | kg                  | 0     |
| Net freshwater consumption specified by water source and fate                                       | m <sup>3</sup>      | 0     |
| Other resources   | kg                  | 0     |
| Electricity consumption   | kwh                 | 0     |
| Other energy carriers   | MJ                  | 0     |
| Product loss per functional unit  | kg                  | 0     |
| Waste materials at the construction site before waste processing, generated by product installation | kg                  | 0     |
| Output materials resulting from on-site waste processing  | kg                  | 0     |
| Mass of packaging waste specified by type   | kg                  | 0.412 |
|   | <i>Recycle</i>      | 0.303 |
|   | <i>Landfill</i>     | 0.087 |
|   | <i>Incineration</i> | 0.022 |
| Biogenic carbon contained in packaging  | kg CO <sub>2</sub>  | 0.732 |
| Direct emissions to ambient air, soil, and water  | kg                  | 0     |
| VOC emissions   | µg/m <sup>3</sup>   | 0     |

#### 4.5 Use

**Table 11.** *Sloan Basys® EFX Sensor Faucet maintenance summary.*

| Maintenance                                      | Unit                                  | Value   |
|--|---------------------------------------|---|
| Description of process                           | -                                     | Daily cleaning with 10 ml 1% sodium lauryl sulfate solution |
| Maintenance cycle                                | Cycles/RSL                            | 3650  |
| Maintenance cycle                                | Cycles/ESL                            | 27,375  |
| Net freshwater consumption                       |                                       |   |
|  | <i>City water disposed to sewer</i>   | 0.036   |
| Ancillary materials                              |                                       |   |
|  | <i>Sodium lauryl sulfate solution</i> | 0.365   |
| Other resources                                  | kg                                    | 0   |
| Energy input                                     | kWh                                   | 0   |
| Other energy carriers                            | kWh                                   | 0   |
| Power output of equipment                        | kW                                    | 0   |
| Waste materials from maintenance                 | kg                                    | 0   |
| Direct emissions to ambient air, soil, and water | kg                                    | 0   |
| Further assumptions for scenario development     | -                                     | -   |

**Table 12.** Sloan Basys® EFX Sensor Faucet repair summary.

| Repair   | Unit           | Value  |
|--|----------------|--|
| Repair process information                       | -              | Per manufacturer, batteries may require 2 replacements per RSL to repair product |
| Inspection process information                   | -              | N/A  |
| Repair cycle                                     | Cycles/RSL     | 2  |
| Repair cycle                                     | Cycles/ESL     | 15   |
| Net freshwater consumption                       | m <sup>3</sup> | 0  |
| Ancillary materials                              | kg             | 0.192  |
| Battery  | kg             | 0.192  |
| Energy input                                     | kWh            | 0  |
| Waste materials from repair                      | kg             | 0.192  |
| Landfill   | kg             | 0.192  |
| Direct emissions to ambient air, soil, and water | kg             | 0  |
| Further assumption for scenario development      | -              | -  |

**Table 13.** Sloan Basys® EFX Sensor Faucet Replacement Summary.

| Replacement                                      | Unit           | Value |
|--|----------------|-------|
| Reference Service Life                           | Years          | 10    |
| Replacement cycle (ESL/RSL)-1                    | -              | 6.5   |
| Energy input                                     | kWh            | 0     |
| Net freshwater consumption                       | m <sup>3</sup> | 0     |
| Ancillary materials                              | kg             | 0     |
| Replacement of materials                         | kg             | 1.34  |
| Direct emissions to ambient air, soil, and water | kg             | 0     |
| Further assumptions for scenario development     | -              | -     |

**Table 14.** Sloan Basys® EFX Sensor Faucet refurbishment summary.

| Refurbishment                                    | Unit           | Value |
|--|----------------|-------|
| Refurbishment process                            | -              | N/A   |
| Refurbishment cycle                              | Cycles/RSL     | 0     |
| Refurbishment cycle                              | Cycles/ESL     | 0     |
| Energy input                                     | kWh            | 0     |
| Net freshwater consumption                       | m <sup>3</sup> | 0     |
| Material input                                   | kg             | 0     |
| Waste materials                                  | kg             | 0     |
| Direct emissions to ambient air, soil, and water | kg             | 0     |
| Further assumption for scenario development      | -              | -     |

**Table 15.** Sloan Basys® EFX Sensor Faucet Operational Energy and Water Use Summary.

| Operational Energy and Water Use                       | Unit   | Lavatory Faucet Products |                   |
|--|--|--------------------------|-------------------|
|  |  | 0.5 gpm (1.9 Lpm)        | 1.5 gpm (5.7 Lpm) |
| Net freshwater consumption                             |  |                          |                   |
| <i>City water to sewer</i>                             | m <sup>3</sup> /RSL  | 111                      | 332               |
| Ancillary materials                                    | kg   | 0                        | 0                 |
| Energy input   | kWh  | 4,438                    | 13,314            |
| Equipment power output                                 | kW   | 0                        | 0                 |
| Characteristic performance                             | -  | -                        | -                 |
| Direct emissions to ambient air, soil, water           | kg   | 0                        | 0                 |
| Further assumptions for scenario development (per PCR) | water use is assumed 70% hot water, 30% cold water heating for hot water is assumed 50% electricity (0.1765 kwh per gallon), 50% natural gas (0.8784 mcf per 1000 gallons) |                          |                   |
| <i>Number of users per product</i>                     | 30   |                          |                   |
| <i>Number of uses per user per day</i>                 | 3  |                          |                   |
| <i>Number of use days per year</i>                     | 260  |                          |                   |

#### 4.6 End-of-Life

**Table 16.** Sloan Basys® EFX Sensor Faucet End-of-Life Summary.

| End-of-life                                       |  | Unit               | Value   |
|---|--|--------------------|---|
| Assumptions for scenario development              |  |                    | Manual deconstruction, followed by 100 km truck transport to final disposal in landfill |
| Collection process                                | Collected separately                     | kg                 | 0   |
|   | Collected with mixed construction waste  | kg                 | 1.34  |
| Recovery  | Reuse                                    | kg                 | 0   |
|   | Recycling                                | kg                 | 0   |
|   | Landfill                                 | kg                 | 1.34  |
|   | Incineration                             | kg                 | 0   |
|   | Incineration with energy recovery        | kg                 | 0   |
|   | Energy conversion                        | -                  | -   |
| Disposal  | Product of material for final deposition | kg                 | 1.34  |
| Removals of biogenic carbon (excluding packaging) |  | kg CO <sub>2</sub> | 0   |

## 5. LCA: Results

Results of the Life Cycle Assessment are presented below. It is noted that LCA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. All LCA results are stated to three significant figures in agreement with the PCR for this product and therefore the sum of the total values may not exactly equal 100%. Modules with zero (0) impacts: B1, B5, C1, and C3 are omitted from the results tables. Module B6 and B7, Operational Energy Use and Operational Water Use, are reported separately for the various flow rate applications available.

The following environmental impact category indicators are reported using characterization factors using the CML-IA impact assessment method and the TRACI 2.1 impact assessment method. Note that for global warming calculations, the CML characterization factors are based on IPCC 2013, while TRACI 2.1 global warming calculations are based on IPCC 2007. Note also that neither characterization method includes biogenic carbon uptake or biomass CO<sub>2</sub> emissions. Based on the component materials of the product and production processes, there are no impacts associated with land-use changes, nor are environmental impacts associated with carbonation relevant for the product system.

**Table 17.** *Mandatory Environmental Impact Assessment Categories.*

| CMLIA Impact Category  | Unit                                 | TRACI 2.1 Impact Category  | Unit                   |
|--|--------------------------------------|--|------------------------|
| <b>GWP:</b> Global Warming Potential                             | kg CO <sub>2</sub> eq.               | <b>GWP:</b> Global Warming Potential                             | kg CO <sub>2</sub> eq. |
| <b>ODP:</b> Depletion potential of the stratospheric ozone layer | kg CFC 11 eq.                        | <b>ODP:</b> Depletion potential of the stratospheric ozone layer | kg CFC 11 eq.          |
| <b>AP:</b> Acidification Potential of soil and water             | kg SO <sub>2</sub> eq.               | <b>AP:</b> Acidification Potential of soil and water             | kg SO <sub>2</sub> eq. |
| <b>EP:</b> Eutrophication Potential                              | kg PO <sub>4</sub> <sup>3-</sup> eq. | <b>EP:</b> Eutrophication Potential                              | kg N eq.               |
| <b>POCP:</b> Photochemical Oxidant Creation Potential            | kg C <sub>2</sub> H <sub>4</sub> eq. | <b>SFP:</b> Smog Formation Potential                             | kg O <sub>3</sub> eq.  |
| <b>ADPE:</b> Abiotic Depletion Potential, elements               | kg Sb eq.                            | <b>FFD:</b> Fossil Fuel Depletion                                | MJ Surplus             |
| <b>ADPF:</b> biotic Depletion Potential, fossil fuels            | MJ                                   |  |                        |

These impact categories are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined and LCA should continue making advances in their development. However, the EPD users shall not use additional measures for comparative purposes. The following inventory parameters, specified by the PCR, are also reported.

**Table 18.** *Additional Transparency Categories.*

| Resources   | Unit           | Waste and Outflows  | Unit    |
|---|----------------|---|---------|
| <b>RPR<sub>E</sub>:</b> Renewable primary resources used as energy carrier (fuel)             | MJ, LHV        | <b>HWD:</b> Hazardous waste disposed                            | kg      |
| <b>RPR<sub>M</sub>:</b> Renewable primary resources with energy content used as material      | MJ, LHV        | <b>NHWD:</b> Non-hazardous waste disposed                       | kg      |
| <b>NRPR<sub>E</sub>:</b> Non-renewable primary resources used as an energy carrier (fuel)     | MJ, LHV        | <b>RWD:</b> Radioactive waste, conditioned, to final repository | kg      |
| <b>NRPR<sub>M</sub>:</b> Non-renewable primary resources with energy content used as material | MJ, LHV        | <b>CRU:</b> Components for re-use                               | kg      |
| <b>SM:</b> Secondary materials  | kg             | <b>MR:</b> Materials for recycling                              | kg      |
| <b>RSF:</b> Renewable secondary fuels   | MJ, LHV        | <b>MER:</b> Materials for energy recovery                       | kg      |
| <b>NRSF:</b> Non-renewable secondary fuels  | MJ, LHV        | <b>EE:</b> Recovered energy exported from the product system    | kg      |
| <b>RE:</b> Recovered energy   | MJ, LHV        | <b>EE:</b> Recovered energy exported from the product system    | MJ, LHV |
| <b>FW:</b> Use of new freshwater resources  | m <sup>3</sup> |   |         |

**Sloan Basys® EFX – Average Sensor Faucet Results**

**Table 19.** Impact indicator results for Sloan Basys® EFX Sensor Faucets.

| CML Impact Method   | GWP                   | ODP                         | AP                    | EP                                  | POCP                                | ADPE                  | ADPF       |
|---------------------|-----------------------|-----------------------------|-----------------------|-------------------------------------|-------------------------------------|-----------------------|------------|
|                     | kg CO <sub>2</sub> eq | kg CFC-11 eq                | kg SO <sub>2</sub> eq | kg PO <sub>4</sub> <sup>3-</sup> eq | kg C <sub>2</sub> H <sub>4</sub> eq | kg Sb eq              | MJ         |
| A1                  | 84.4                  | 6.10x10 <sup>-6</sup>       | 0.498                 | 0.396                               | 0.020                               | 0.029                 | 919        |
| A2                  | 0.205                 | 2.61x10 <sup>-9</sup>       | 0.003                 | 3.86x10 <sup>-4</sup>               | 8.75x10 <sup>-5</sup>               | 4.06x10 <sup>-7</sup> | 2.66       |
| A3                  | 0.528                 | 2.07x10 <sup>-8</sup>       | 0.001                 | 0.001                               | 1.81x10 <sup>-4</sup>               | 1.83x10 <sup>-6</sup> | 6.16       |
| <b>A1-A3 Total:</b> | <b>85.1</b>           | <b>6.12x10<sup>-6</sup></b> | <b>0.502</b>          | <b>0.398</b>                        | <b>0.020</b>                        | <b>0.029</b>          | <b>928</b> |
| A4                  | 1.94                  | 2.55x10 <sup>-8</sup>       | 0.009                 | 0.002                               | 3.70x10 <sup>-4</sup>               | 5.96x10 <sup>-6</sup> | 26.9       |
| A5                  | 0.020                 | 1.46x10 <sup>-10</sup>      | 3.42x10 <sup>-5</sup> | 1.40x10 <sup>-5</sup>               | 1.60x10 <sup>-6</sup>               | 2.85x10 <sup>-8</sup> | 0.133      |
| B2                  | 6.67                  | 1.02x10 <sup>-7</sup>       | 0.024                 | 0.008                               | 0.002                               | 4.30x10 <sup>-5</sup> | 150        |
| B3                  | 0.014                 | 2.74x10 <sup>-10</sup>      | 6.82x10 <sup>-5</sup> | 1.65x10 <sup>-5</sup>               | 3.58x10 <sup>-6</sup>               | 2.72x10 <sup>-8</sup> | 0.284      |
| B4                  | 566                   | 3.99x10 <sup>-5</sup>       | 3.32                  | 2.60                                | 0.131                               | 0.187                 | 6210       |
| C2                  | 0.025                 | 3.36x10 <sup>-10</sup>      | 8.22x10 <sup>-5</sup> | 2.11x10 <sup>-5</sup>               | 3.99x10 <sup>-6</sup>               | 8.20x10 <sup>-8</sup> | 0.356      |
| C4                  | 0.013                 | 2.54x10 <sup>-10</sup>      | 6.32x10 <sup>-5</sup> | 1.53x10 <sup>-5</sup>               | 3.32x10 <sup>-6</sup>               | 2.52x10 <sup>-8</sup> | 0.263      |
| TRACI Impact Method | GWP                   | ODP                         | AP                    | EP                                  | SFP                                 | FFD                   |            |
|                     | kg CO <sub>2</sub> eq | kg CFC-11 eq                | kg SO <sub>2</sub> eq | kg N eq                             | kg O <sub>3</sub> eq                | MJ Surplus            |            |
| A1                  | 83.8                  | 6.55x10 <sup>-6</sup>       | 0.512                 | 0.867                               | 6.37                                | 72.7                  |            |
| A2                  | 0.204                 | 3.44x10 <sup>-9</sup>       | 0.003                 | 2.37x10 <sup>-4</sup>               | 0.063                               | 0.384                 |            |
| A3                  | 0.517                 | 3.62x10 <sup>-8</sup>       | 0.002                 | 0.002                               | 0.033                               | 0.800                 |            |
| <b>A1-A3 Total:</b> | <b>84.5</b>           | <b>6.59x10<sup>-6</sup></b> | <b>0.518</b>          | <b>0.869</b>                        | <b>6.47</b>                         | <b>73.9</b>           |            |
| A4                  | 1.92                  | 3.37x10 <sup>-8</sup>       | 0.010                 | 0.002                               | 0.242                               | 3.84                  |            |
| A5                  | 0.020                 | 1.86x10 <sup>-10</sup>      | 4.15x10 <sup>-5</sup> | 2.28x10 <sup>-5</sup>               | 0.001                               | 0.019                 |            |
| B2                  | 6.65                  | 1.22x10 <sup>-7</sup>       | 0.026                 | 0.034                               | 0.352                               | 19.8                  |            |
| B3                  | 0.013                 | 3.64x10 <sup>-10</sup>      | 8.27x10 <sup>-5</sup> | 1.60x10 <sup>-5</sup>               | 0.002                               | 0.041                 |            |
| B4                  | 562                   | 4.31x10 <sup>-5</sup>       | 3.43                  | 5.66                                | 43.6                                | 506                   |            |
| C2                  | 0.025                 | 4.43x10 <sup>-10</sup>      | 9.87x10 <sup>-5</sup> | 2.38x10 <sup>-5</sup>               | 0.003                               | 0.051                 |            |
| C4                  | 0.012                 | 3.37x10 <sup>-10</sup>      | 7.67x10 <sup>-5</sup> | 1.48x10 <sup>-5</sup>               | 0.002                               | 0.038                 |            |

**Table 20.** Additional Resource Use and Waste indicators for the Sloan Basys® EFX Sensor Faucets.

| Resource Use        | RPR <sub>E</sub>            | RPR <sub>M</sub> | NRPR <sub>E</sub> | NRPR <sub>M</sub> | SM           | RSF         | NRSF        | RE          | FW                    |
|---------------------|-----------------------------|------------------|-------------------|-------------------|--------------|-------------|-------------|-------------|-----------------------|
|                     | MJ                          | MJ               | MJ                | MJ                | kg           | MJ          | MJ          | MJ          | m <sup>3</sup>        |
| A1                  | 127                         | 0.00             | 1090              | 0.00              | 0.00         | 0.00        | 0.00        | 0.00        | 0.751                 |
| A2                  | 0.032                       | 0.00             | 2.69              | 0.00              | 0.00         | 0.00        | 0.00        | 0.00        | 2.74x10 <sup>-4</sup> |
| A3                  | 10.6                        | 0.00             | 9.61              | 0.00              | 0.412        | 0.00        | 0.00        | 0.00        | 0.016                 |
| <b>A1-A3 Total:</b> | <b>138</b>                  | <b>0.00</b>      | <b>1100</b>       | <b>0.00</b>       | <b>0.412</b> | <b>0.00</b> | <b>0.00</b> | <b>0.00</b> | <b>0.767</b>          |
| A4                  | 0.338                       | 0.00             | 27.3              | 0.00              | 0.00         | 0.00        | 0.00        | 0.00        | 0.003                 |
| A5                  | 0.002                       | 0.00             | 0.135             | 0.00              | 0.00         | 0.00        | 0.00        | 0.00        | 5.18x10 <sup>-5</sup> |
| B2                  | 5.05                        | 0.00             | 158               | 0.00              | 0.00         | 0.00        | 0.00        | 0.00        | 0.338                 |
| B3                  | 0.003                       | 0.00             | 0.288             | 0.00              | 0.00         | 0.00        | 0.00        | 0.00        | 2.44x10 <sup>-4</sup> |
| B4                  | 896                         | 0.00             | 7320              | 0.00              | 2.68         | 0.00        | 0.00        | 0.00        | 5.01                  |
| C2                  | 0.005                       | 0.00             | 0.361             | 0.00              | 0.00         | 0.00        | 0.00        | 0.00        | 4.55x10 <sup>-5</sup> |
| C4                  | 0.003                       | 0.00             | 0.267             | 0.00              | 0.00         | 0.00        | 0.00        | 0.00        | 2.27x10 <sup>-4</sup> |
| Waste & Output      | HWD                         | NHWD             | HLRW/ILLRW        | CRU               | MR           | MER         | EE          |             |                       |
|                     | kg                          | kg               | kg                | kg                | kg           | kg          | MJ, LHV     |             |                       |
| A1                  | 0.00                        | 0.00             | 0.00              | 0.00              | 0.00         | 0.00        | 0.00        |             |                       |
| A2                  | 0.00                        | 0.00             | 0.00              | 0.00              | 0.00         | 0.00        | 0.00        |             |                       |
| A3                  | 4.01x10 <sup>-6</sup>       | 0.280            | 0.00              | 0.00              | 0.107        | 0.00        | 0.00        |             |                       |
| <b>A1-A3 Total:</b> | <b>4.01x10<sup>-6</sup></b> | <b>0.280</b>     | <b>0.00</b>       | <b>0.00</b>       | <b>0.107</b> | <b>0.00</b> | <b>0.00</b> |             |                       |
| A4                  | 0.00                        | 0.00             | 0.00              | 0.00              | 0.00         | 0.00        | 0.00        |             |                       |
| A5                  | 0.00                        | 0.106            | 0.00              | 0.00              | 0.308        | 0.00        | 0.00        |             |                       |
| B2                  | 0.00                        | 0.00             | 0.00              | 0.00              | 0.00         | 0.00        | 0.00        |             |                       |
| B3                  | 0.00                        | 0.00             | 0.00              | 0.00              | 0.00         | 0.00        | 0.00        |             |                       |
| B4                  | 0.00                        | 8.68             | 0.00              | 0.00              | 0.00         | 0.00        | 0.00        |             |                       |
| C2                  | 0.00                        | 0.00             | 0.00              | 0.00              | 0.00         | 0.00        | 0.00        |             |                       |
| C4                  | 0.00                        | 1.34             | 0.00              | 0.00              | 0.00         | 0.00        | 0.00        |             |                       |



**Sloan Basys® EFX Sensor Faucet Results for Operational Energy and Water Use Modules (B6 and B7)****Table 21.** Impact indicator results for Sloan Basys® EFX Sensor Faucets Module B6 per ESL.

| CML Impact Method   |                                     | Operational Energy Use |                       |
|---------------------|-------------------------------------|------------------------|-----------------------|
|                     |                                     | 0.5 gpm                | 1.5 gpm               |
| GWP                 | kg CO <sub>2</sub> eq               | 9,210                  | 27,600                |
| ODP                 | kg CFC-11 eq                        | 6.56x10 <sup>-5</sup>  | 1.97x10 <sup>-4</sup> |
| AP                  | kg SO <sub>2</sub> eq               | 18.9                   | 56.8                  |
| EP                  | kg PO <sub>4</sub> <sup>3-</sup> eq | 14.9                   | 44.8                  |
| POCP                | kg C <sub>2</sub> H <sub>4</sub> eq | 1.04                   | 3.12                  |
| ADPE                | kg Sb eq                            | 0.056                  | 0.167                 |
| ADPF                | MJ                                  | 120,000                | 361,000               |
| TRACI Impact Method |                                     | Operational Energy Use |                       |
|                     |                                     | 0.5 gpm                | 1.5 gpm               |
| GWP                 | kg CO <sub>2</sub> eq               | 9,140                  | 27,400                |
| ODP                 | kg CFC-11 eq                        | 1.18x10 <sup>-4</sup>  | 3.54x10 <sup>-4</sup> |
| AP                  | kg SO <sub>2</sub> eq               | 19.2                   | 57.6                  |
| EP                  | kg N eq                             | 32.7                   | 98.1                  |
| SFP                 | kg O <sub>3</sub> eq                | 227                    | 681                   |
| FFD                 | MJ Surplus                          | 14,900                 | 44,700                |

**Table 22.** Additional Resource Use and Waste indicators for the Sloan Basys® EFX Sensor Faucets Module B6 per ESL.

| Resource Use      |                | Operational Energy Use |         |
|-------------------|----------------|------------------------|---------|
|                   |                | 0.5 gpm                | 1.5 gpm |
| RPR <sub>E</sub>  | MJ, LHV        | 14,300                 | 42,800  |
| RPR <sub>M</sub>  | MJ, LHV        | 0.00                   | 0.00    |
| NRPR <sub>E</sub> | MJ, LHV        | 159,000                | 478,000 |
| NRPR <sub>M</sub> | MJ, LHV        | 0.00                   | 0.00    |
| SM                | kg             | 0.00                   | 0.00    |
| RSF               | MJ, LHV        | 0.00                   | 0.00    |
| NRSF              | MJ, LHV        | 0.00                   | 0.00    |
| RE                | MJ, LHV        | 0.00                   | 0.00    |
| FW                | m <sup>3</sup> | 48.1                   | 144     |
| Waste & Output    |                | Operational Energy Use |         |
|                   |                | 0.5 gpm                | 1.5 gpm |
| HWD               | kg             | 0.00                   | 0.00    |
| NHWD              | Kg             | 0.00                   | 0.00    |
| HLRW/ILLRW        | kg             | 0.00                   | 0.00    |
| CRU               | kg             | 0.00                   | 0.00    |
| MR                | kg             | 0.00                   | 0.00    |
| MER               | kg             | 0.00                   | 0.00    |
| EE                | MJ, LHV        | 0.00                   | 0.00    |

**Table 23.** Impact indicator results for Sloan Basys® EFX Sensor Faucets Module B7 per ESL.

| CML Impact Method   |                                     | Operational Water Use |                       |
|---------------------|-------------------------------------|-----------------------|-----------------------|
|                     |                                     | 0.5 gpm               | 1.5 gpm               |
| GWP                 | kg CO <sub>2</sub> eq               | 1,020                 | 3,070                 |
| ODP                 | kg CFC-11 eq                        | 2.43x10 <sup>-4</sup> | 7.30x10 <sup>-4</sup> |
| AP                  | kg SO <sub>2</sub> eq               | 4.42                  | 13.3                  |
| EP                  | kg PO <sub>4</sub> <sup>3-</sup> eq | 1.61                  | 4.82                  |
| POCP                | kg C <sub>2</sub> H <sub>4</sub> eq | 0.232                 | 0.696                 |
| ADPE                | kg Sb eq                            | 0.005                 | 0.014                 |
| ADPF                | MJ                                  | 10,900                | 32,600                |
| TRACI Impact Method |                                     | Operational Water Use |                       |
|                     |                                     | 0.5 gpm               | 1.5 gpm               |
| GWP                 | kg CO <sub>2</sub> eq               | 1,010                 | 3,040                 |
| ODP                 | kg CFC-11 eq                        | 2.49x10 <sup>-4</sup> | 7.46x10 <sup>-4</sup> |
| AP                  | kg SO <sub>2</sub> eq               | 4.59                  | 13.8                  |
| EP                  | kg N eq                             | 3.14                  | 9.41                  |
| SFP                 | kg O <sub>3</sub> eq                | 63.7                  | 191                   |
| FFD                 | MJ Surplus                          | 797                   | 2,390                 |

**Table 24.** Additional Resource Use and Waste indicators for the Sloan Basys® EFX Sensor Faucets Module B7 per ESL.

| Resource Use      |                | Operational Water Use |         |
|-------------------|----------------|-----------------------|---------|
|                   |                | 0.5 gpm               | 1.5 gpm |
| RPR <sub>E</sub>  | MJ, LHV        | 1,180                 | 3,530   |
| RPR <sub>M</sub>  | MJ, LHV        | 0.00                  | 0.00    |
| NRPR <sub>E</sub> | MJ, LHV        | 12,300                | 37,000  |
| NRPR <sub>M</sub> | MJ, LHV        | 0.00                  | 0.00    |
| SM                | kg             | 0.00                  | 0.00    |
| RSF               | MJ, LHV        | 0.00                  | 0.00    |
| NRSF              | MJ, LHV        | 0.00                  | 0.00    |
| RE                | MJ, LHV        | 0.00                  | 0.00    |
| FW                | m <sup>3</sup> | 791                   | 2,370   |
| Waste & Output    |                | Operational Water Use |         |
|                   |                | 0.5 gpm               | 1.5 gpm |
| HWD               | kg             | 0.00                  | 0.00    |
| NHWD              | Kg             | 0.00                  | 0.00    |
| HLRW/ILLRW        | kg             | 0.00                  | 0.00    |
| CRU               | kg             | 0.00                  | 0.00    |
| MR                | kg             | 0.00                  | 0.00    |
| MER               | kg             | 0.00                  | 0.00    |
| EE                | MJ, LHV        | 0.00                  | 0.00    |

## 6. LCA: INTERPRETATION

The interpretation phase conforms to ISO 14044. The interpretation included the use of evaluation and sensitivity checks to steer the iterative process during the assessment, and a final evaluation including completeness, sensitivity, and consistency checks, at the end of the study.

The contributions to total impact indicator results are dominated by the use phase impacts, specifically, the operational energy and water use modules (B6 and B7) with as much as 90% of the overall impacts and secondly by the use phase replacement module (B4). When examining the results without the operation use phase impacts and without the replacement module impacts, the results are dominated by the raw material module (A1) with the product maintenance module (B2) also showing significant impacts.

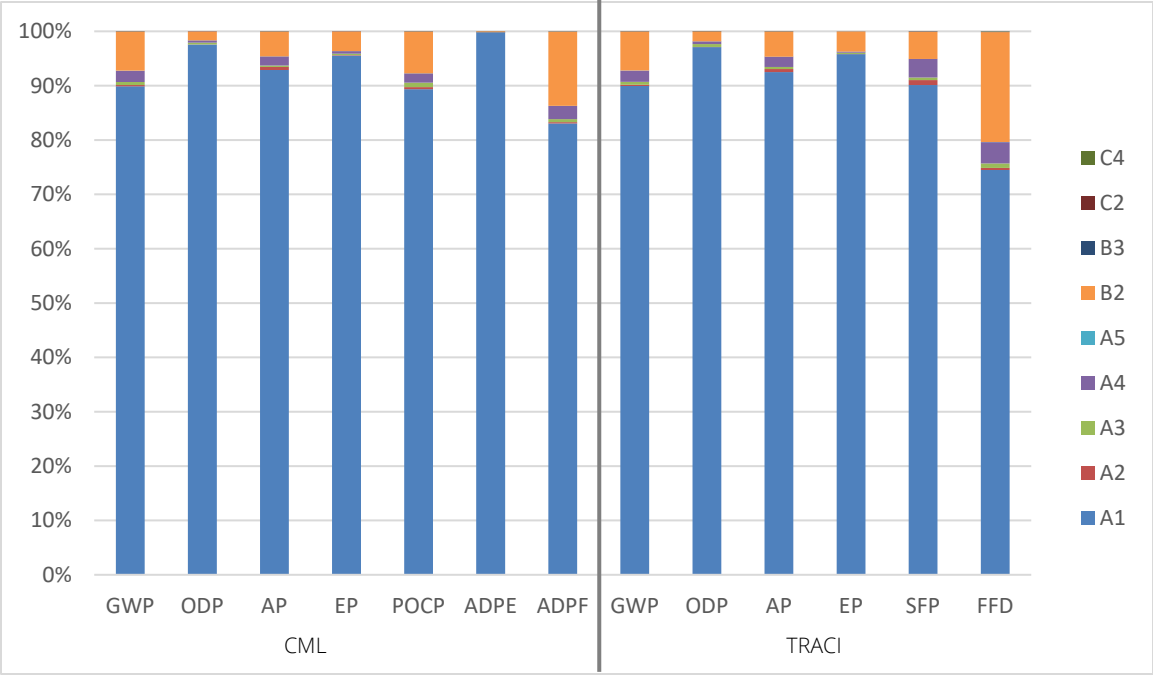


Figure 2. Contribution analysis for the Sloan Basys EFX Sensor Faucets (excluding Modules B4, B6, and B7).

## 7. ADDITIONAL ENVIRONMENTAL INFORMATION

Sloan is a proud member of the United States Green Building Council (USGBC) and through the use of Leadership in Energy and Environmental Design (LEED) Green Building Rating System, Sloan recognizes and validates the importance of best-on-class building strategies and practices of high performing green buildings. Sloan’s Basys® EFX faucets within this EPD can be used to help achieve water efficiency goals as well as gaining USGBC LEED v4 points and complying with building codes.

No environmental or health impacts are expected due to extraordinary effects including fire and/or water damage and product destruction.

For more information on Sloan’s certifications and environmental initiatives please visit the website at [www.sloan.com](http://www.sloan.com).

## 8. REFERENCES

1. CML-IA Characterization Factors. Leiden University, Institute of Environmental Sciences. April 2013. <https://www.universiteitleiden.nl/en/research/research-output/science/cml-ia-characterisation-factors>
2. Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI). U.S. EPA.
3. Ecoinvent v3.9.1 2022. Swiss Center for Life Cycle Inventories, 2010. <http://www.ecoinvent.org>
4. ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and Procedures.
5. ISO 14040: 2006/Amd 1:2020 Environmental Management – Life cycle assessment – Principles and Framework
6. ISO 14044: 2006/Amd 1:2017/ Amd 2:2020 Environmental Management – Life cycle assessment – Requirements and Guidelines.
7. ISO 21930: 2017 Sustainability in building construction – Environmental declaration of building products.
8. Life Cycle Assessment of Sensor Faucets. SCS Global Services Final Report. Prepared for Sloan Valve Company. July 2023.
9. SCS Type III Environmental Declaration Program: Program Operator Manual. V12.0 December 2023. SCS Global Services.
10. UL. PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 3.2. December 2018.
11. UL PCR Guidance for Building-Related Products and Services Part B: Kitchen and Bath Fixture Fittings and Accessory Products EPD Requirements. Version 1.0. October 2020.

For more information please contact



**Sloan Valve Company**

10500 Seymour Avenue

Franklin Park, IL 60131

customer.service@sloan.com | 800-982-5839

<https://www.sloan.com>



**SCS Global Services**

2000 Powell Street, Ste. 600, Emeryville, CA 94608 USA

Main +1.510.452.8000 | fax +1.510.452.8001