

**OPTIONS****Flush Volume**

- 1.0 gpf (3.8 Lpf) (1.0)
- 0.5 gpf (1.9 Lpf) (0.5)
- 0.125 gpf (0.5 Lpf) (0.125)
- 1.5 gpf (5.7 Lpf) (1.5)
- 0.25 gpf (0.9 Lpf) (0.25)
- 3.5 gpf (13.2 Lpf) (3.5)

**Water Efficiency**

- High Efficiency
- Low Consumption
- Water Saver

**Bypass**

- Dual-Filtered Fixed Bypass Diaphragm
- Dual-Filtered Bypass

**Handle**

- Saniguard®
- Front of Valve (H)
- Nickel-Silver (YA)

**Push Button**

- Metal Index (L)

**Control Stop**

- Less (L/STOP)

**Vacuum Breaker**

- Less (XYV)

**Offset**

- 2" (51mm) (2-OFST)

**Adapter**

- Cast Set Screw Wall Flange (YBC)

**Pipe Support**

- Split Ring (YJ)

**Special Features**

- Less Logo (LL)

**Compliances & Certifications**

- BAA Compliant
- BABAA Compliant
- UPC Certified
- ADA Compliant
- Made in the USA
- cUPC Certified
- Satisfies LEED Credits

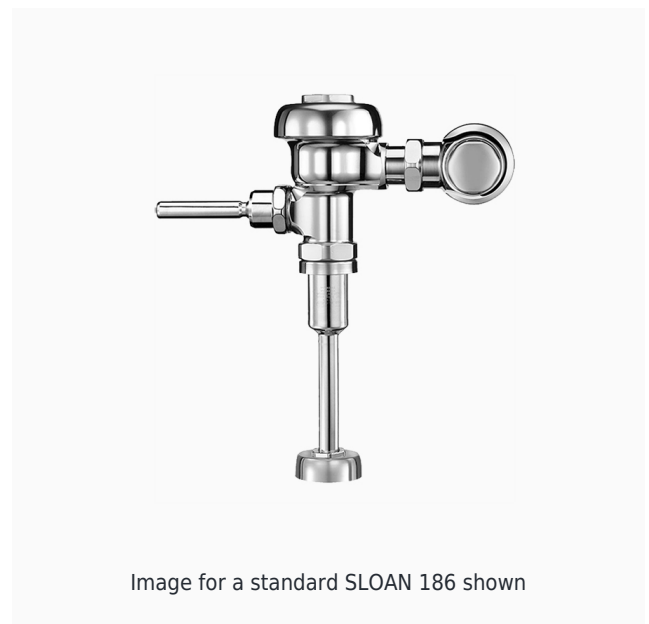


Image for a standard SLOAN 186 shown

**DESCRIPTION**

Sloan® Exposed Manual Urinal Flushometer

**FEATURES**

- Flush volumes start as low as 0.125 gpf/0.5 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents urinal from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece to accommodate different height requirements
- High chloramine resistant PERMEX synthetic rubber diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

**DOWNLOADS**

- [Sloan Exposed Installation Instructions](#)
- [Sloan Exposed \(Spanish\) Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Sloan Flushometer Repair and Maintenance Guide](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)

WaterSense Listed  
BREEAM Water Credit  
Green Globes Water Credit

- [Bumper Pipe and Tube Supports Repair & Maintenance Guide](#)
- [Flushometer Pressure gauges](#)
- [Additional Downloads](#)

**NOTES**

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.